

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(10) International Publication Number**  
**WO 01/06797 A1**

- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

The diagram illustrates a computer system 300 with the following components and connections:

- From Analog Transducer 910**: Provides input to the **NTSC CAMERA OSCILLATOR 104**.
- NTSC CAMERA OSCILLATOR 104**: Outputs **ARRANGED  $V, Y, B$**  to the **SHOOTER 106**.
- SHOOTER 106**: Outputs  **$V, R, B, P_0$**  to the **DISPLAY PROCESSOR 110**.
- SHOOTER 106**: Also outputs  **$V, P_0, P_0$**  to the **DISPLAY OSCILLATOR 107**.
- DISPLAY OSCILLATOR 107**: Outputs  **$V, R, B, P_0$**  to the **DISPLAY PROCESSOR 110**.
- DISPLAY PROCESSOR 110**: Receives  **$V, R, B, P_0$**  from the shooter and oscillator, and outputs  **$V, B, P_0$**  to the **MINI-PROCESSOR 165**.
- MINI-PROCESSOR 165**: Outputs  **$V, P_0, P_0$**  to the **DISPLAY OSCILLATOR 107** and  **$V, R, B$**  to the **DISPLAY OSCILLATOR 112**.
- DISPLAY OSCILLATOR 112**: Outputs  **$V, P_0, P_0$**  to the **DISPLAY OSCILLATOR 114** and  **$R, G, B$**  to the **DISPLAY OSCILLATOR 176**.
- DISPLAY OSCILLATOR 114**: Outputs  **$V, P_0, P_0$**  to the **DISPLAY OSCILLATOR 176**.
- DISPLAY OSCILLATOR 176**: Outputs  **$P, A, B$**  to the **DISPLAY OSCILLATOR 116**.
- DISPLAY OSCILLATOR 116**: Outputs  **$P, A, B$**  to the **CPT 162**.
- From Digital Transducer 1151**: Provides input to the **MINI-PROCESSOR 165**.
- From Analog Transducer 910**: Also provides input to the **MINI-PROCESSOR 165**.
- MINI-PROCESSOR 165**: Also outputs  **$V, R, B, P_0$**  to the **SHOOTER 106**.

**WO 01/06797 A1**

REF. AF DU030213  
COUNTRY EUROPE  
CORRES. US/UK

**METHOD AND APPARATUS FOR PROVIDING ON-SCREEN DISPLAYS FOR A  
MULTI-COLORIMETRY RECEIVER**

The invention relates to an apparatus and a  
5 method for processing video signals, and more particularly,  
to an apparatus and a method for processing on screen  
display (OSD) signals and video signals from various  
sources having different colorimetries.

Modern television receivers are designed to  
10 receive and process video signals from various sources, for  
example, analog television signals from a National  
Television Standards Committee (NTSC) transmission or a  
video tape, as well as digital video signals transmitted in  
accordance with the ATSC Digital Television Standard, A/54  
15 (1995). Different signal sources may be encoded according  
to different colorimetries. "Colorimetry" refers to the  
combination of color primaries, transfer characteristics,  
and matrix coefficients associated with generating and  
processing color representative signals. For example, NTSC  
20 signals comply with SMPTE 170M colorimetry and ATSC signals  
default to comply with ITU-R BT.709 (1990) colorimetry.  
Additionally, ISO/IEC 13818-2 provides for the broadcaster  
to specify the input colorimetry to the receiver to allow  
for other colorimetry combinations.

25 In view of the possible differences in  
colorimetries between different signals, it is desirable to  
design television receiver circuitry with colorimetry  
compensation so that the video display of the signals from  
the various sources has a uniform colorimetry. Such  
30 circuitry compensates the input video signals such that the  
color of similar objects are substantially similar  
regardless of the particular colorimetry. For example, a  
flesh tone from an ATSC source should appear similar to a  
flesh tone from an NTSC source.

35 Television receivers also produce and display OSD  
graphics that provide information and enable user interface  
functions. Typically, the OSDs are generated in response  
to user input to provide information about a program or the

receiver, and to allow the user to control functions such as channel selection, image quality and the like. An OSD system usually comprises a common source of OSD signals, which signals are generated by a processing unit in response to received signals or user input, stored in a memory, and then read out and combined with the received video signals. The signals are combined after colorimetry compensation has been performed on the video signal. The OSD signals are combined with the video signals in a mixer that is controlled by a microprocessor. As the lines of the image are traced on a CRT, or a similar display device, the microprocessor selects either the OSD signal or the video signal for output in response to an output of a counter, thereby selectively inserting the OSD image onto the video program image.

However, it may be desirable to couple the OSD signal to the video signal prior to the colorimetry compensation. Coupling the signals prior to the colorimetry compensation can reduce memory requirements and reduce processing delays. In this regard, OSD colors may change when colorimetry compensation is applied to a combined signal that includes video program and OSD signals. As such, the OSD graphics colorimetry may change substantially from one video source to another. Therefore, it is also desirable to couple the OSD signal to the video signal prior to the colorimetry compensation in a manner that provides uniform color output of the OSD image regardless of the signal source.

The present invention provides a method and apparatus for coupling an OSD signal with a video program signal prior to colorimetry compensation. In particular, the present invention provides a method and apparatus for coupling an OSD signal with a video program signal prior to colorimetry compensation in a manner that the displayed OSD colors are uniform regardless of the signal source.

In one aspect, the present invention comprises an OSD unit having an OSD palette, which OSD unit is coupled to a display processor. The output of the display

processor is coupled to one of a plurality of matrices to provide colorimetry compensation. The output of the selected matrix is coupled to a display unit, for example a CRT, a flat panel display or the like, for providing an  
5 output image.

In another aspect, the present invention comprises an OSD unit having a plurality of OSD palettes, each one of the plurality of OSD palettes having OSD data stored in a particular colorimetry format and being  
10 associated with a particular one of a plurality of signal sources. A display processor is coupled, via a switch, to a selected one of the OSD palettes in response to the selection of a particular signal source. In this manner, the colorimetry of the OSD signal matches the colorimetry  
15 of the video program signal from the signal source. The output of the display processor is coupled to one of a plurality of matrices to provide colorimetry compensation. The output of the selected matrix is coupled to a display unit.

In another aspect, the present invention comprises an OSD unit having an OSD palette, and a plurality of OSD matrices, each one of the plurality of OSD matrices adapted to provide a particular colorimetry compensation and being associated with a particular one of  
25 a plurality of signal sources. The OSD palette is coupled to a selected one of the OSD matrices in response to the selection of a particular signal source. In this manner, the colorimetry of the OSD signal is adjusted to match the colorimetry of the video program signal from the selected  
30 signal source. The output of the selected OSD matrix is coupled to a display processor, wherein the OSD signal is combined with a video program signal. The output of the display processor is then coupled, via a switch, to a selected one of a plurality of matrices to provide  
35 colorimetry compensation. The output of the selected matrix is coupled to a display unit.

Therefore, in accordance with the present invention, the colorimetry of the OSD signal is matched to

the colorimetry of the video signal, and the OSD signal is coupled to the video program signal prior to the matrix operation of the combined signal thereby providing uniform OSD colors at the display regardless of the signal source.

5           The teachings of the present invention are described with reference to the accompanying drawings, wherein:

FIG. 1 illustrates a block diagram of an OSD system wherein the OSD signal is coupled to the video  
10 signal prior to the colorimetry compensation;

FIG. 2 illustrates a block diagram of an OSD system wherein the OSD signal is coupled to the video program signal in a manner to provide uniform colorimetry regardless of the signal source; and

15           FIG. 3 illustrates a block diagram of a another embodiment of an OSD system wherein the OSD signal is coupled to the video program signal in a manner to provide uniform colorimetry regardless of the signal source.

To facilitate understanding, common reference  
20 numerals have been used to designate elements that are common to the figures.

FIG. 1 depicts a simplified block diagram of a video signal processing apparatus 100 in accordance with the present invention. The construction of the elements of  
25 apparatus 100 are known to those skilled in the art and will not be discussed in detail here.

Apparatus 100 comprises NTSC chroma decoder 104, which receives an NTSC signal via input 150. The NTSC signal is received and demodulated and coupled to chroma  
30 decoder 104 in the conventionally known manner. Chroma decoder 104 provides a luminance signal Y and two color difference signals I and Q. The color difference signals I and Q comprise R-Y and B-Y components of different magnitude and represent signals on quadrature axes rotated  
35 33 degrees counterclockwise from the R-Y, B-Y axes.

The analog output signal Y, I, and Q are applied to digitizer 106 that provides digital representations of the signals, designated Y, P<sub>I</sub> and P<sub>Q</sub>. The digital

representations are coupled to a first terminal of switch 122. Switch 122, as well as the various other switches illustrated in the figures that couple the various program or OSD signals to the respective processors or matrices, is  
5 controlled by microprocessor 165, which controls the overall operation of the apparatus. Microprocessor 165 may comprise any one of a plurality of control devices known to those skilled in the art for controlling the various elements of the apparatus. Also, although the present  
10 invention describes a single microprocessor, those skilled in the art will realize that microprocessor 165 may comprise various dedicated devices to control specific functions, i.e., a memory controller, a microprocessor interface unit, and the like.

15 Digital video signals are coupled to digital video decoder 108 via input 151. Digital video decoder provides output signals  $Y$ ,  $P_R$  and  $P_B$ , which are coupled to a second input of switch 122. The color difference signals  $P_R$  and  $P_B$  comprise R-Y and B-Y signals that are modified  
20 by scale factors. The output of switch 122 is coupled to display processor 110, which includes a buffer memory for holding video data and/or combined video and OSD data to be read out. The read out of the video data stored in display processor 110 is controlled by microprocessor 165.

25 The OSD signals are generated using OSD palette 102, which includes representations of the OSD signals in  $Y$ ,  $P_R$ , and  $P_B$  format. OSD palette 102 may be embodied in software form, wherein a particular sequence of bits is associated with a particular color. Based on the color  
30 information in OSD palette 102, microprocessor 165 generates an OSD bitstream and transfers the generated OSD bitstream to display processor 110. The generated OSD bitstream is combined with the video program signal based on the desired location of the OSD image on the output  
35 image. Thus, the memory of display processor 110 includes a bit mapped representation of the output signal, which includes the video program image combined with the OSD image.

When it is desired to display the bit mapped image stored in display processor 110, the stored bitstream corresponding to the image is read out to either one of the matrices 112 or 114 via switch 124. Microprocessor 165  
5 controls switch 124 to couple the output of display processor 110 to the input of matrix 114 if the input signal is an analog signal, and couple the output of display processor 110 to the input of matrix 112 if the input signal is a digital signal. Matrices 112 and 114  
10 operate in the conventionally known manner to provide RGB output signals in response to the input signals. By selecting the appropriate one of the matrices 112 and 114, proper colorimetry processing is applied to the selected input signal to provide a display having uniform  
15 colorimetry regardless of the selected input signal.

Switch 126 couples the output of the selected matrix with the input of display controller 116. Display controller 116 generally includes circuitry for controlling the output image in response to user input controls, such  
20 as brightness and contrast. The output of display controller 116 is then coupled to a display device 120, which may include a CRT, a flat panel display, or the like.

In apparatus 100, an OSD signal is coupled to display processor 110 prior to matrices 112 and 114, which  
25 convert the input signals to RGB format for display. This is in contrast with prior art devices, wherein the OSD signal is combined with the video program signal in a mixer disposed downstream of display controller 116.

However, apparatus 100 does not match the  
30 colorimetry of the OSD signals in response to the selected signal source. This may lead to undesired changes in the colors of the OSD depending on the selected signal source. In other words, the OSD colors will change as the colorimetry compensation is changed. To avoid such  
35 changes, it is desirable to modify the OSD colors to complement the compensation provided to the video program signal.

Fig. 2 illustrates a second embodiment of the present invention, wherein OSD colors are modified to complement the colorimetry processing applied to the combined video signal. Apparatus 200 includes OSD palettes 5 103 and 105, wherein OSD palette 103 provides output signals in the Y,  $P_R$ ,  $P_B$  format, and OSD palette 105 provides output signals in the Y,  $P_I$ ,  $P_Q$  format. In operation, OSD palette 105 is coupled to display processor 110 when an analog input signal is selected via signal 10 source 150 and OSD palette 103 is coupled to display processor 110 when a digital input signal is selected via signal source 151. The desired one of palettes and 103 and 105 is selected by switch 140, which is controlled by microprocessor 165.

15 When apparatus 200 receives an analog signal via source 150, switch 122 is coupled to the output of digitizer 106, switch 140 is coupled to the output of OSD palette 105, switch 124 is coupled to matrix 114, and switch 126 is coupled to matrix 114. In this manner, the 20 input signal and the OSD signal are both in the Y,  $P_I$ ,  $P_Q$  format and the colorimetries match.

Similarly, when apparatus 200 receives a digital signal via source 151, switch 122 is coupled to the output of digital video decoder 108, switch 140 is coupled to the 25 output of OSD palette 103, switch 124 is coupled to matrix 112, and switch 126 is coupled to matrix 112. Here, the input signal and the OSD signal are both in the Y,  $P_R$ ,  $P_B$  format and the colorimetries again match. As a result, the colors of the OSD remain uniform regardless of whether the 30 input signal is from signal source 150 or 151.

Fig. 3 illustrates another embodiment of the present invention, wherein OSD colors are modified to complement the colorimetry compensation applied to the video program signal. In apparatus 300, OSD palette 125 is 35 coupled to display processor 110 via either matrix 107 or matrix 109. In this case, OSD palette 125 stores the OSD information in RGB format. Matrix 107 operates on the OSD signals from OSD palette 125 to provide Y,  $P_R$ ,  $P_B$



formatted signals. Matrix 109 operates on the OSD signals to provide Y, P<sub>I</sub>, P<sub>Q</sub> formatted signals. The outputs of matrices 107 and 109 are coupled to display processor 110 via switch 140, which is controlled by microprocessor 165.

5           When source 150 is selected, thereby providing Y, P<sub>I</sub>, P<sub>Q</sub> signals to display processor 110, switch 122 is coupled to the output of digitizer 106, switch 142 is coupled to the input of matrix 109, switch 140 is coupled to the output of matrix 109, switch 124 is coupled to  
10 matrix 114, and switch 126 is coupled to matrix 114. In this manner, the input signal and the OSD signal are both in the Y, P<sub>I</sub>, P<sub>Q</sub> format and the colorimetries match.

          Similarly, when source 151 is selected, thereby providing Y, P<sub>R</sub>, P<sub>B</sub> signals to display processor 110,  
15 switch 122 is coupled to the output of digital video decoder 108, switch 142 is coupled to matrix 107, switch 140 is coupled to matrix 107, switch 124 is coupled to matrix 112, and switch 126 is coupled to matrix 112. Here, the video signal and the OSD signal are both in the Y, P<sub>R</sub>,  
20 P<sub>B</sub> format and the colorimetries again match. As the colorimetry of the OSD signal match the colorimetry of the input video signal regardless of the signal source, the colors of the OSD on the output image remain uniform regardless of whether the input signal is an analog signal  
25 or a digital signal.

          It will be apparent to those skilled in the art that although the present invention has been described in terms of various exemplary embodiments, modifications and changes may be made to the disclosed embodiment without  
30 departing from the essence of the invention. For example, those skilled in the art will realize that various elements for operating on the video or OSD signals, as well as the switches for coupling the signals from one element to another may be implemented in either hardware or software  
35 form using conventionally known techniques. Therefore, it is to be understood that the present invention is intended to cover all modifications as would fall within the true scope and spirit of the present invention.

What is claimed is:

1. A video signal processing apparatus,  
5 comprising:
  - a first video signal source (150) for providing a first video signal having a first color format;
  - a second video signal source (151) for providing a second video signal having a second color format;
  - 10 means for generating an On Screen Display (OSD) signal (103,105,165) having one of a plurality of color formats, the generating means having a plurality of color palettes, each palette having color information in a particular color format; and
  - 15 means for combining the OSD signal (110,140) with a selected one of the first or second video signals, the generating means providing the OSD signal in a color format that corresponds the color format of the selected one of the first or second video signals.
  - 20
2. The apparatus of claim 1, wherein one of the plurality of color palettes (103) comprises color information in a Y, P<sub>R</sub>, P<sub>B</sub> format.
- 25 3. The apparatus of claim 1, wherein one of the plurality of color palettes (105) comprises color information in a Y, P<sub>I</sub>, P<sub>Q</sub> format.
4. The apparatus of claim 1, wherein the first  
30 video signal is an analog television signal.
5. The apparatus of claim 1, wherein the second video signal is a digital television signal.
- 35 6. The apparatus of claim 1, wherein the generating means comprises:
  - a single color palette (125) comprising color information in a fourth color format; and

a plurality of color conversion matrices (107,109) adapted to be selectively coupled to the single color palette.

5           7. The apparatus of claim 6, wherein the first color format is RGB format.

8. The apparatus of claim 6, wherein the conversion matrices (107) convert the first color format  
10 into Y, P<sub>R</sub>, P<sub>B</sub> format.

9. The apparatus of claim 6, wherein the conversion matrices (109) convert the first color format into Y, P<sub>I</sub>, P<sub>Q</sub> format.  
15

10. A method of producing graphics having a color format that matches the color format of a received signal, the method comprising the steps of:

identifying a signal source type (150,151)  
20 associated with a received signal;

selecting a color palette (103,105) having a color format that matches the format of the received signal;

generating a graphics signal (Y,P<sub>R</sub>,P<sub>B</sub>;Y,P<sub>I</sub>,P<sub>Q</sub>)  
25 in response to the selected color palette;

combining said graphics signal with the received signal; and

processing the combined signal to generating an output signal (RBG).  
30

11. The method of claim 10, further comprising the step of:

producing the selected color palette by converting a single color palette into a plurality of color  
35 palettes using a plurality of color conversion matrices.

12. The method of claim 11, wherein the color conversion matrices convert an RGB formatted signal into a Y, P<sub>R</sub>, P<sub>B</sub> formatted signal.

5           13. The method of claim 11, wherein the color conversion matrices convert an RGB formatted signal into a Y, P<sub>I</sub>, P<sub>Q</sub> formatted signal.

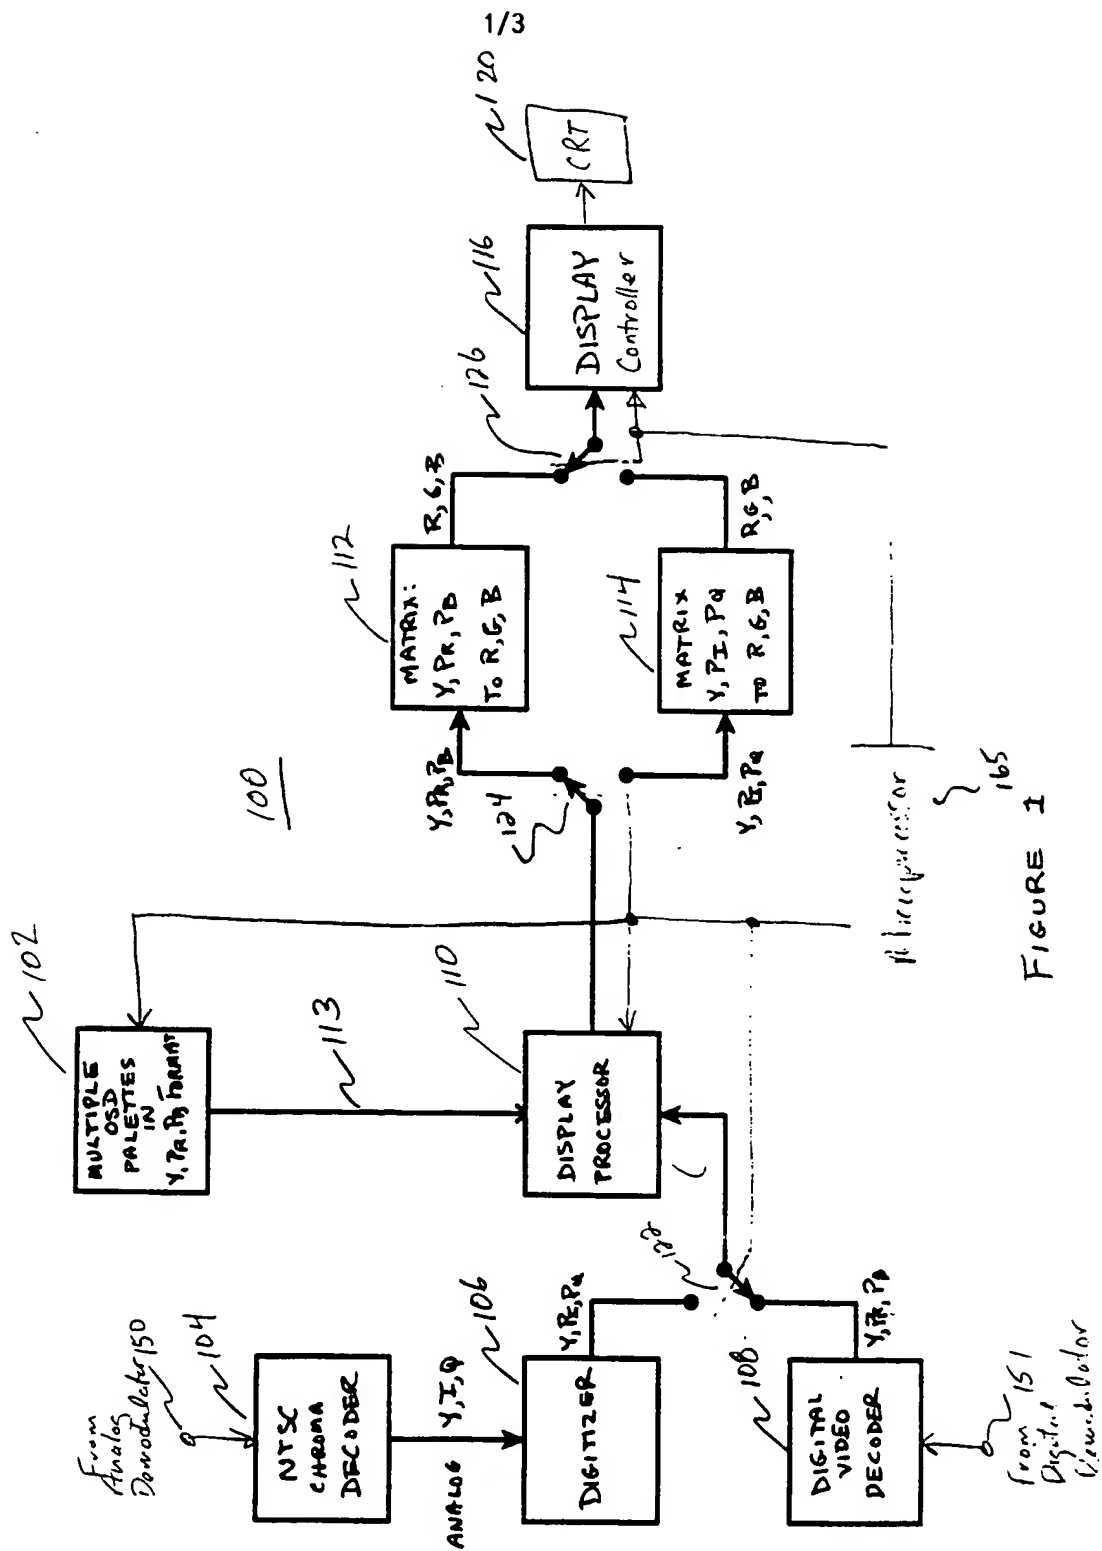


FIGURE 1

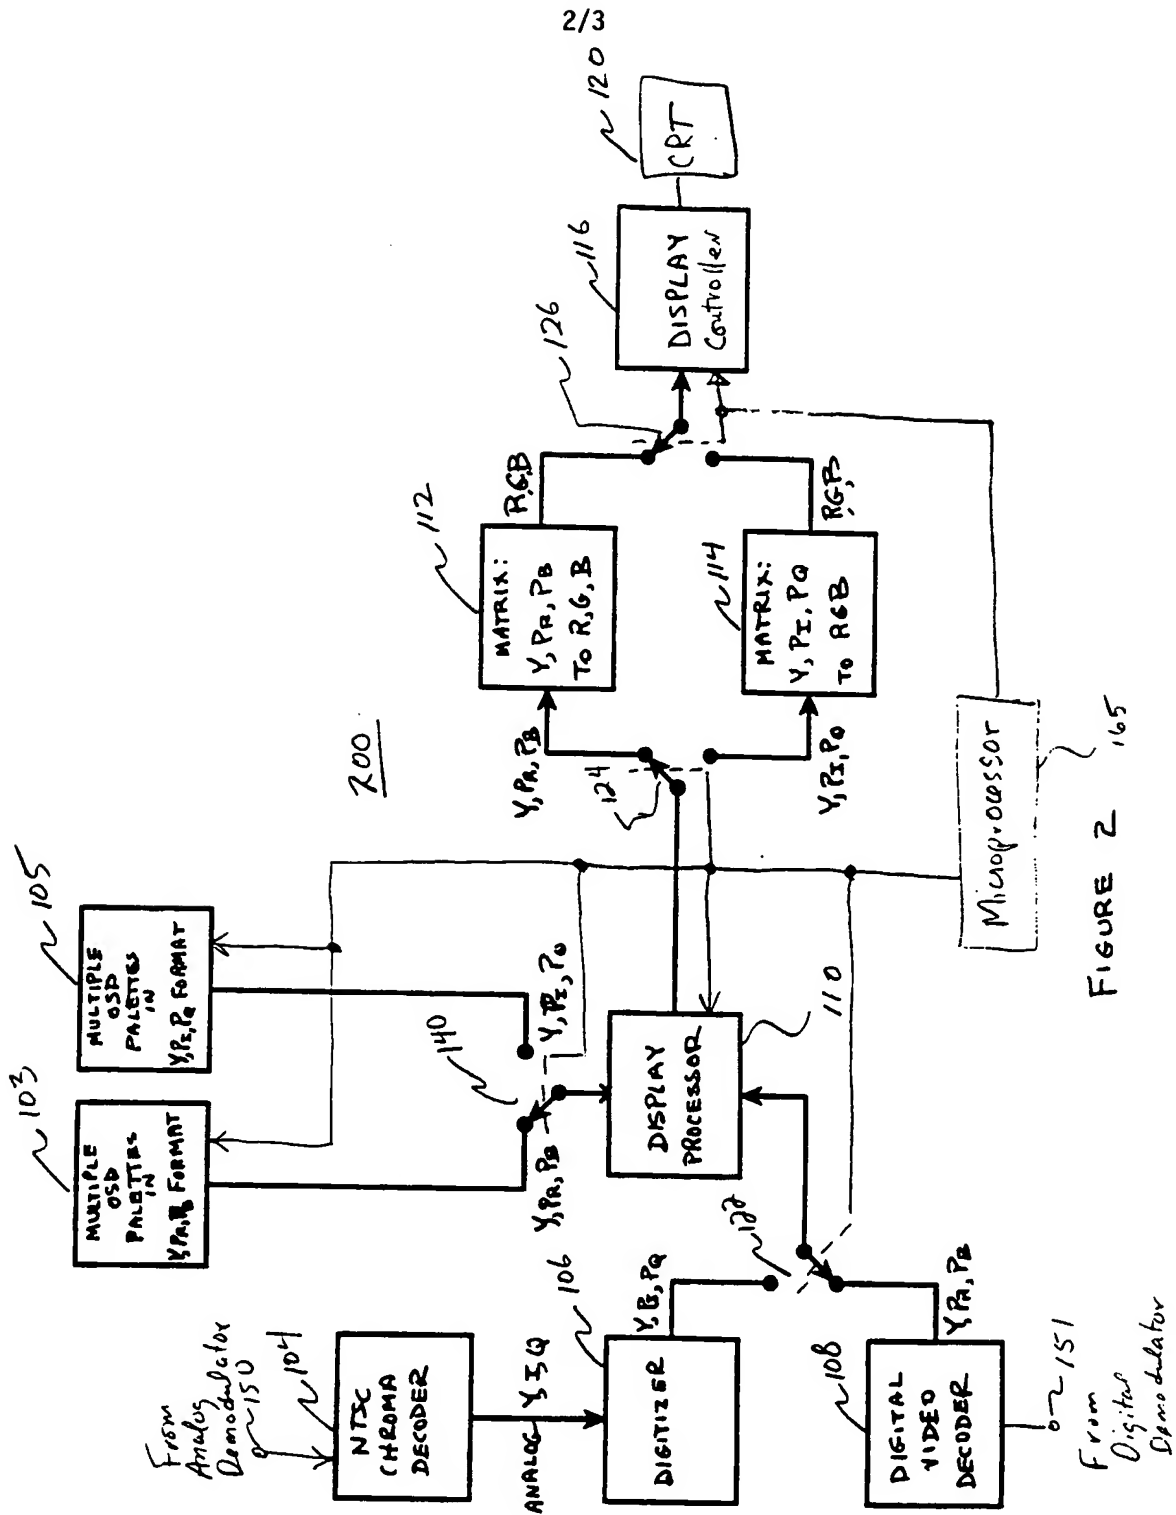


FIGURE 2

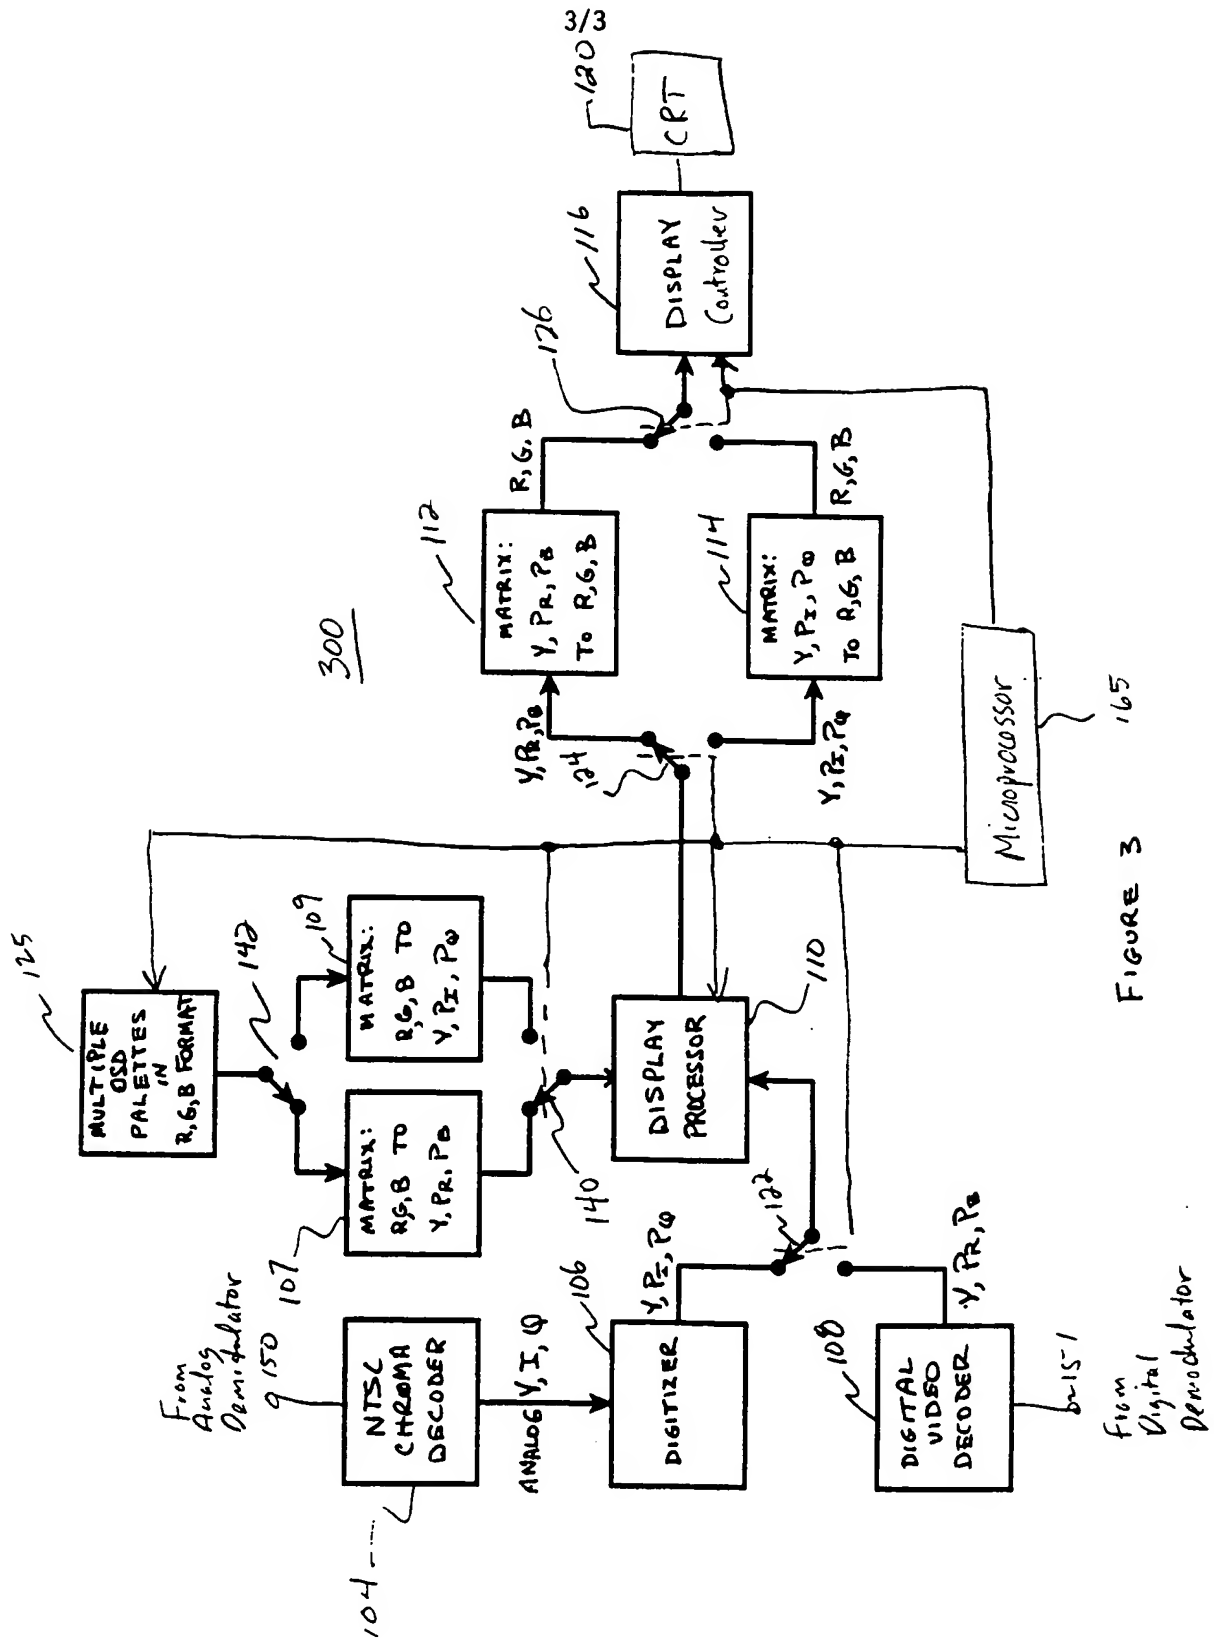


FIGURE 3

# INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/US 00/17477

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04N9/64 G09G5/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 10678 A (BLATTER HAROLD ; THOMSON CONSUMER ELECTRONICS (US)) 20 March 1997 (1997-03-20) abstract; figure 3 page 5, line 16 -page 10, line 34 ---	1,10
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 02, 26 February 1999 (1999-02-26) & JP 10 304272 A (KENWOOD CORP), 13 November 1998 (1998-11-13) abstract ---	1,10
A	EP 0 833 506 A (FUJI PHOTO FILM CO LTD) 1 April 1998 (1998-04-01) abstract; figure 2 -----	1,10



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

\* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* "&" document member of the same patent family

Date of the actual completion of the international search

27 October 2000

Date of mailing of the international search report

06/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Pigniez, T



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 00/17477

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9710678 A	20-03-1997	AU 6977496 A	01-04-1997
		AU 7071296 A	01-04-1997
		AU 7071396 A	01-04-1997
		AU 7109396 A	01-04-1997
		AU 7159296 A	01-04-1997
		BR 9610521 A	30-03-1999
		BR 9610529 A	06-07-1999
		BR 9610539 A	06-07-1999
		BR 9610549 A	06-07-1999
		CN 1200859 A	02-12-1998
		CN 1200858 A	02-12-1998
		CN 1201579 A	09-12-1998
		CN 1201580 A	09-12-1998
		CN 1201581 A	09-12-1998
		DE 69601583 D	01-04-1999
		DE 69601583 T	24-06-1999
		DE 69606185 D	17-02-2000
		DE 69606185 T	25-05-2000
		EP 0850541 A	01-07-1998
		EP 0850542 A	01-07-1998
		EP 0850543 A	01-07-1998
		EP 0850544 A	01-07-1998
		EP 0853858 A	22-07-1998
		ES 2140898 T	01-03-2000
		JP 11512584 T	26-10-1999
		JP 11512585 T	26-10-1999
		JP 11512586 T	26-10-1999
		JP 11512587 T	26-10-1999
		JP 11512588 T	26-10-1999
		US 6034738 A	07-03-2000
		WO 9710679 A	20-03-1997
		WO 9710680 A	20-03-1997
		WO 9710681 A	20-03-1997
		WO 9710682 A	20-03-1997
JP 10304272 A	13-11-1998	NONE	
EP 0833506 A	01-04-1998	DE 69129730 D	13-08-1998
		DE 69129730 T	12-11-1998
		EP 0484981 A	13-05-1992
		JP 2898807 B	02-06-1999
		JP 5216463 A	27-08-1993
		US 5426731 A	20-06-1995
		US 5327156 A	05-07-1994